

ATEM 2 M/E Advanced Panel 30



The 2 M/E model features 2 M/E rows with 30 input buttons and 3 independent system control LCDs for each row. Plus each row can control up to 4 M/Es in larger switchers. Both rows and all input buttons include LCDs for custom labeling. Each row also includes an independent select bus!

US\$8,619


Connections

Ethernet

4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

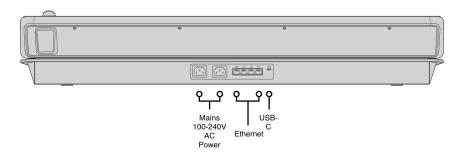

Product Specifics

Number of Mix Effects Rows	Crosspoint Label	Preview Transition
2	6 rows 24 character LCD	2
Direct Cross Points	On-Air indicator	Transition Rate Displays
30	12	Via main menu
Shifted Cross Points	Power Status Indicators	LCD Menu Displays
Shifted Cross Points 60	Power Status Indicators None	LCD Menu Displays
		' '

Dedicated Macro Buttons

2 x 30

Source Select Bus

Numeric Keypad

2

Transport Control Buttons

8

Fader Bar

2

Destination Bus 3 Axis Joystick

1

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac 13.0 Ventura, Mac 14.0 Sonoma or later.



Windows 10 and 11.

Power Requirements

Input Voltage

2 x Internal 100 - 240V AC.

Redundant Power

Yes

Power Usage

120W

Physical Specifications





Environmental Specifications Operating Temperature Relative Humidity Storage Temperature 0° to 40° C (32° to 104° F) -20° to 60° C (-4° to 140° F) Up to 95% What's Included ATEM 2 M/E Advanced Panel 30 Welcome wallet with QR code for software download Warranty 12 Month Limited Manufacturer's Warranty. All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes local import taxes. Excludes local VAT and local shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy Blackmagic Design Authorized Reseller